

# Compact, 10 Watt, High Voltage Modules

www.emcohighvoltage.com

**EMCO**  
High Voltage Corporation

0 to + or - 100 through 0 to + or - 12,000 VDC @ 10 Watts  
F Series



## FEATURES

Proven Reliability  
Very Low EMI/RFI  
PCB Mountable  
Compact Package  
Input/Output Isolation  
Convection Cooling/No Derating Required  
Input/Output Filtering  
Low Ripple

## OPTIONS

Mounting Holes, add H to model number(e.g. F10H)  
Output Center Tap, See CT Series  
AC Output, add AC to model number(e.g. F10AC)  
0 to 24 Volts Input (contact factory)

## APPLICATIONS

Capacitor Charging  
Spectrometry  
Piezo Devices  
Lamp Ignition  
Lamp Drive  
Q Switches  
Ion Pumps  
Electrostatic Field Generation  
Grid Bias  
Electrophoresis  
Lasers  
Electrostatic Chucks

## PHYSICAL CHARACTERISTICS

F01-F60: 2.8 x 1.7 x 0.85 (71 x 43 x 21) See Dwg on Sheet 2  
F80-F121: 2.8 x 1.7 x 0.95 (71 x 43 x 24) see Dwg on Sheet 2  
WEIGHT: <5 Ounces (142 grams)  
PACKAGING: Epoxy Encapsulated  
CASE MATERIAL: Black Anodized Aluminum

## ELECTRICAL SPECIFICATIONS

INPUT VOLTAGE: See Table  
TYPICAL TURN-ON VOLTAGE: 0.7 Volts  
OUTPUT VOLTAGE: See Table  
OUTPUT CURRENT: See Table  
RIPPLE: See Table  
ISOLATION: 3,500 Volts + Vout  
EFFICIENCY: >70% Typical  
OPERATING TEMP: -10° to +50° C


The F Series is a broad line of versatile, robust, DC to HV DC converters providing 100 VDC to 12,000 VDC (positive or negative polarity) at 10 Watts continuous output power.\*<sup>1</sup> The output is proportional to the input voltage and features a low 0.7 typical turn-on voltage. Seventeen models are available covering the range of 0 to 100 through 0 to 12,000 volts, positive or negative. These modules exhibit very low EMI/RFI, noise and ripple by means of a quasi-sinewave

oscillator, a fully enclosed transformer, input and output filtering, and a five sided metal enclosure. The isolated output allows for user selectable output polarity. Options include two mounting holes and an output center-tap option which, when grounded, provides both positive and negative outputs from one compact, low cost module. Contact our Applications Department for immediate technical assistance.

MODEL	INPUT VOLTAGE	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE	OUTPUT* <sup>1</sup> CURRENT	RIPPLE
F01	0 to 12	<500 mA	<1.75 A	0 to +/-100	100 mA	<1.0%
F02	0 to 12	<500 mA	<1.5 A	0 to +/-200	50 mA	<1.0%
F03	0 to 12	<500 mA	<1.5 A	0 to +/-300	33.3 mA	<1.0%
F04	0 to 12	<500 mA	<1.5 A	0 to +/-400	25 mA	<1.0%
F05	0 to 12	<500 mA	<1.5 A	0 to +/-500	20 mA	<0.1%
F06	0 to 12	<500 mA	<1.5 A	0 to +/-600	16 mA	<0.1%
F08	0 to 12	<500 mA	<1.5 A	0 to +/-800	12.5 mA	<0.1%
F10	0 to 12	<500 mA	<1.5 A	0 to +/-1,000	10 mA	<0.1%
F15	0 to 12	<500 mA	<1.5 A	0 to +/-1,500	6.6 mA	<0.1%
F20	0 to 12	<500 mA	<1.5 A	0 to +/-2,000	5 mA	<1.0%
F30	0 to 15	<500 mA	<1.5 A	0 to +/-3,000	3.3 mA	<1.0%
F40	0 to 15	<500 mA	<1.5 A	0 to +/-4,000	2.5 mA	<1.0%
F50	0 to 15	<500 mA	<1.5 A	0 to +/-5,000	2 mA	<1.0%
F60	0 to 15	<500 mA	<1.5 A	0 to +/-6,000	1.66 mA	<1.0%
F80	0 to 15	<500 mA	<1.5 A	0 to +/-8000	1.25 mA	<2.5%
F101	0 to 15	<500 mA	<1.5 A	0 to +/-10,000	1 mA	<2.5%
F121	0 to 15	<500 mA	<1.5 A	0 to +/-12,000	.834 mA	<2.5%

\*Note 1. At Maximum Rated Output Voltage.

SEE SHEET 2 FOR MECHANICAL

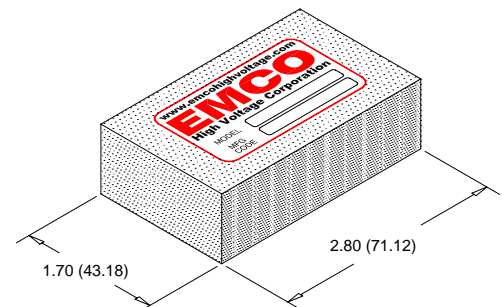

Dimensions are in inches  
Dimensional Tolerances: ± .03 (.76mm)  
(Metric equivalents in parenthesis)

e-mail sales@emcohighvoltage.com  
Web site www.emcohighvoltage.com


Phne (209) 223-3626 Fax (209) 223-2779  
11126 Ridge Road, Sutter Creek CA 95685

# Compact, 10 Watt High Voltage Modules

www.emcohighvoltage.com

**EMCO**  
High Voltage Corporation


0 to + or - 100 through 0 to + or - 12,000 VDC @ 10 Watts  
F Series

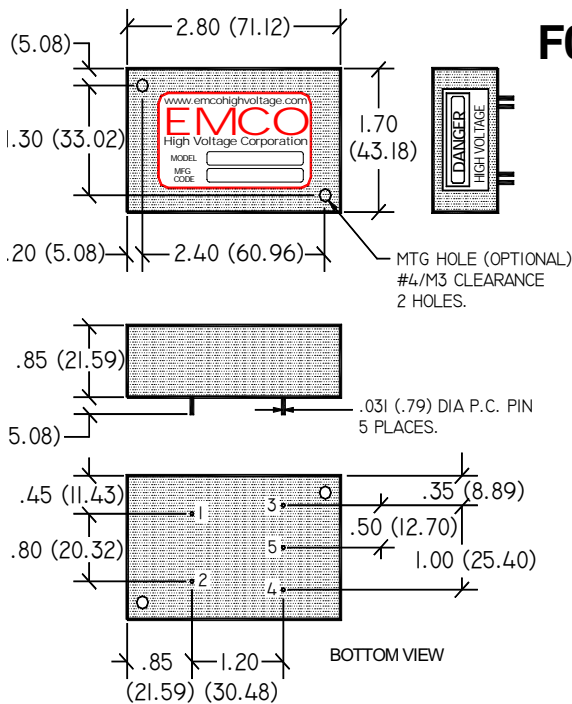

PIN #	FUNCTION
1	(+) Input
2	(-) Input
3	(+) Output
4	(-) Output
5	Center tap (optional)

Dimensions are in Inches  
 Dimensional Tolerances:  $\pm 0.03$  ( $\pm 0.76$ )  
 (Metric equivalents in parenthesis)

Note: Case is internally connected to (-) input.

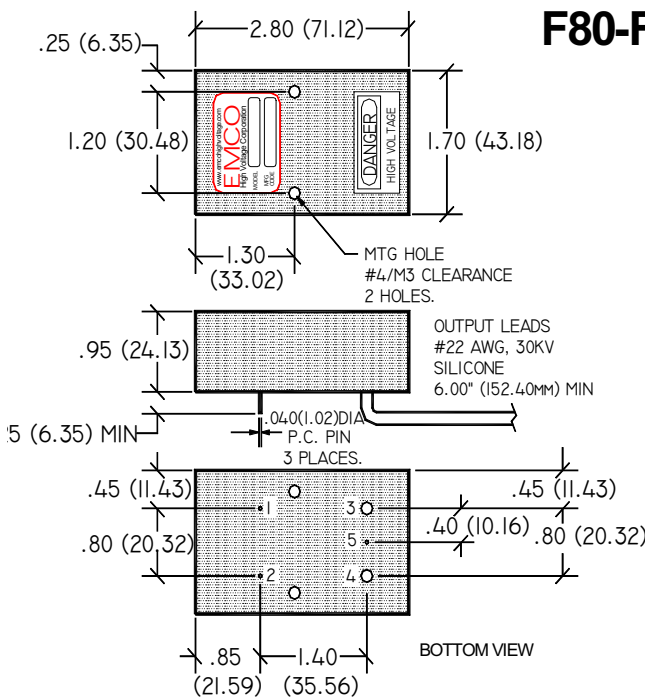

PIN #	FUNCTION
1	(+) Input
2	(-) Input
3*	(+) Output
4*	(-) Output
5	Center tap (optional)

Dimensions are in Inches  
 Dimensional Tolerances:  $\pm 0.03$  ( $\pm 0.76$ )  
 (Metric equivalents in parenthesis)

\*Output Leads

Note: Case is internally connected to (-) input.